



Slabs

Slabs is an American Made Porcelain Tile Slab Collection in Large Format sizes. Slabs offers 9 styles from the Classic Carrara look to Vintage Stone looks in both Matte and Polished finishes.

1. Book Matching in colors (1cm, Polished only).
800-105P, 800-106P.
800-108P, 800-109P.
2. Thickness 1cm and 6mm.
3. Interior and exterior application.


Sizes

USA
MADE/STOCK

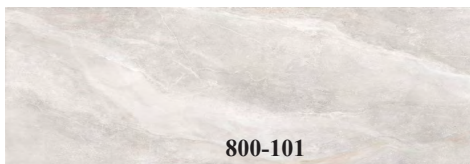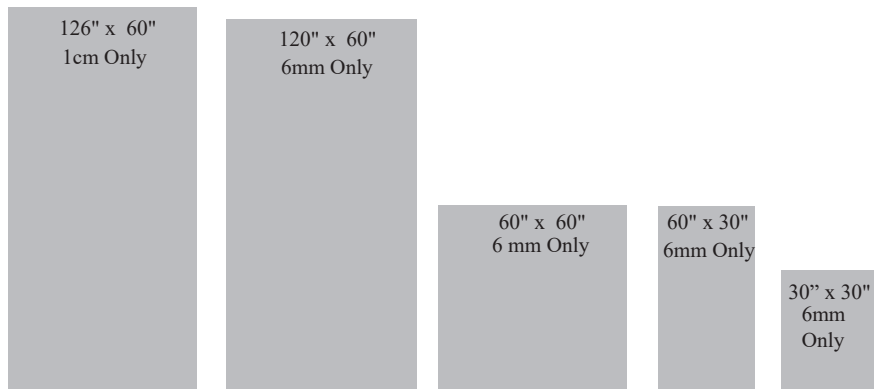


Polished	NO	YES	YES	YES	YES
Matte	NO	YES	YES	YES	YES

800-101

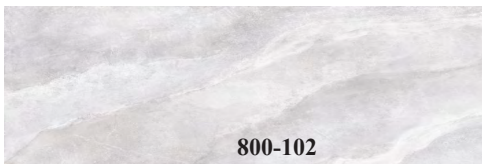

Polished	NO	YES	YES	YES	YES
Matte	NO	YES	YES	YES	YES

800-102

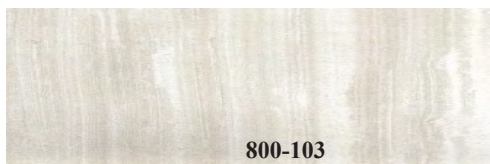

Polished	NO	YES	YES	YES	YES
Matte	NO	YES	YES	YES	YES

800-103





Polished	YES	YES	YES	YES	YES
Matte	NO	YES	YES	YES	YES


800-104

Sizes


USA
MADE/STOCK

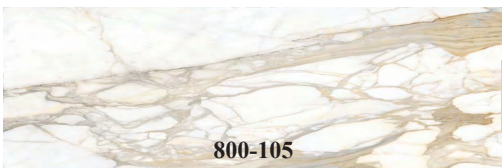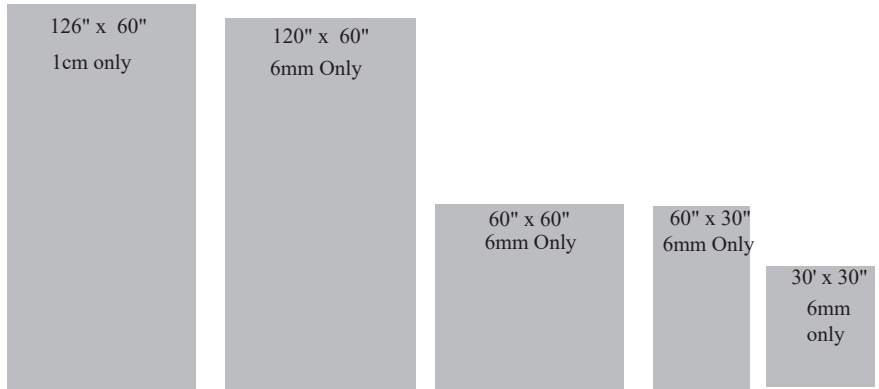


Polished	YES	YES	YES	YES	YES
Matte	NO	YES	YES	YES	YES

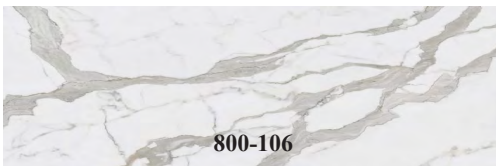


Polished	YES	YES	YES	YES	YES
Matte	NO	YES	YES	YES	YES

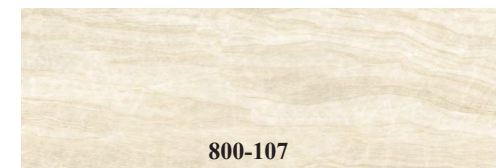

Polished	YES	YES	NO	NO	YES
Matte	NO	NO	NO	NO	NO

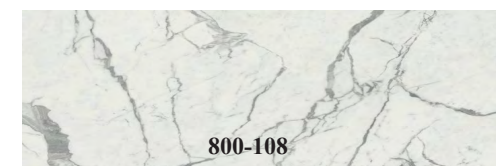

Polished	YES	YES	YES	YES	YES
Matte	NO	YES	YES	YES	YES

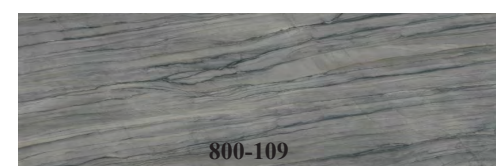

Polished	YES	YES	YES	YES	YES
Matte	NO	YES	YES	YES	YES



Floor and Wall Solutions

Order Samples at
331-702-2178
www.mondanicollection.com

1. FINISHES:

Matte and Polished

Thickness: 6 mm

Recommended Grout Joint: 3/32" or greater All sizes modular with 3/16" grout joint

Grout joints of 1/8" inch or less, may require floor flatness values in excess of the 1/16" in 10' (or 1/16" in 1.0') standard required by ANSI.

2. TECHNICAL DATA

Physical Properties	ASTM: tests	Mondani Results
Water Absorption	C373	≤ 0.1%
Size	C499	≤ 0.040
Breaking Strength	C648	≥ 250 lbf
Hardness (Mohs)	Scratch Test: (Not regulated)	≥ 7
Deep Abrasion	C1243	≤ 130 mm
Chemical Resistance	C650	Class A
Stain Resistance	C1374	Class A Honed
DCOF	Bot: 3000	≥ 0.42
Robertson test	AC627	Extra Heavy

All values given are for matte and semi-polished. No values are given for polished material. Mondani Collection does not recommend polished surfaces in area subject to exposure from grease, oil or water.

For level interior spaces to be walked upon when wet (see ANSI A137.1 section 6.2.2.1.10 – Section 9.6 for test procedure).


3. INSTALLATION

All installation work using Mondani Collection tiles will conform to the standards set forth in the latest version of ANSI A108/118 and/or the TCNA Handbook for Ceramic Tile installations.

Installation or setting materials:



Movement joints shall be provided throughout the tile and work will conform to ANSI Specification A108.01-3.7; A108.02 – 4.4. and TCNA Details EJ171.

Setting materials used will conform to the ANSI 118.4 standard or greater and be recommended by the selected manufacturer for the installation & setting materials for ceramic or porcelain tile based on the application requirements.

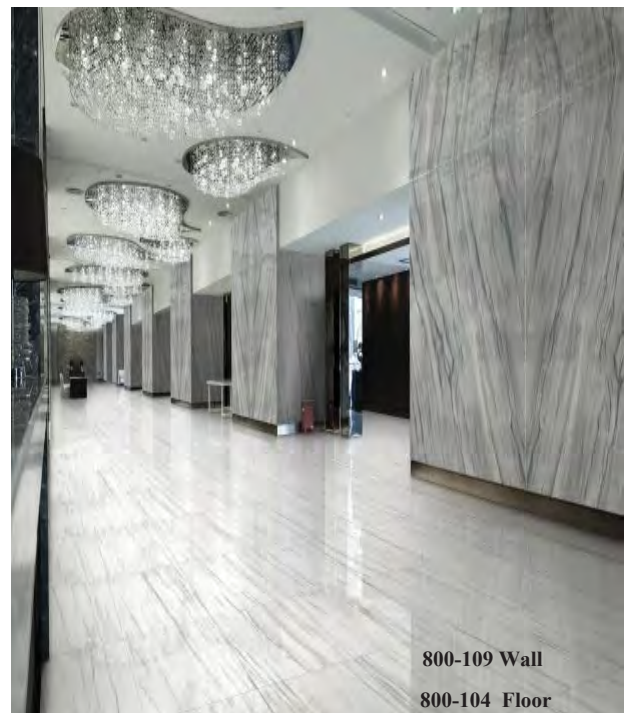

800-109 Wall
800-104 Floor



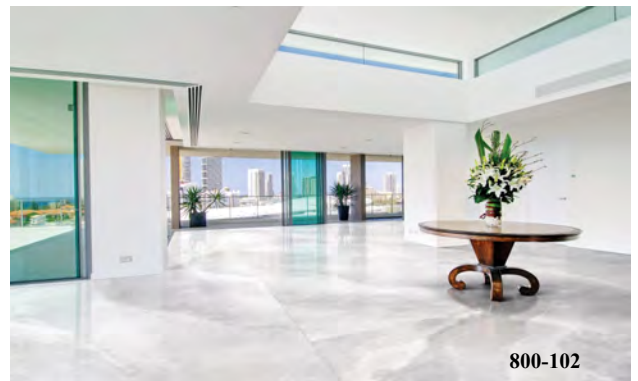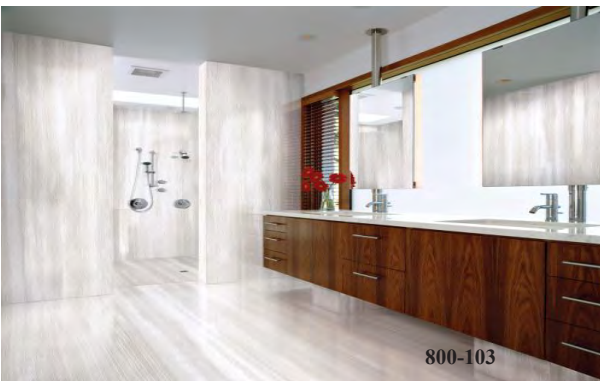

Book-match


1 cm Thickness Only




Block A Block B Block A Block B



Block A Block B Block A Block B

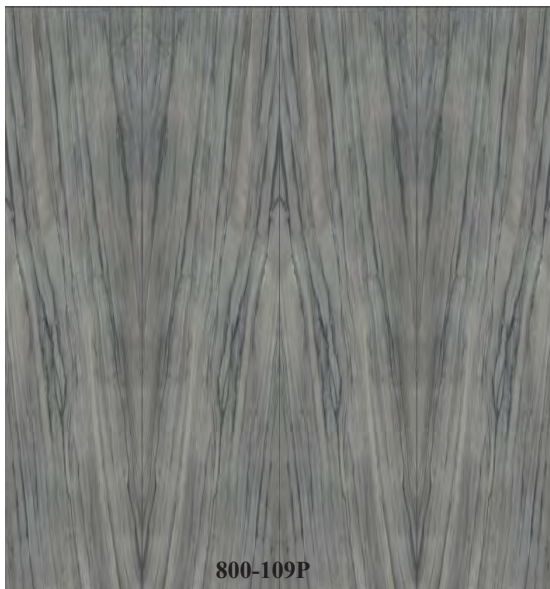

Block A Block B Block A Block B

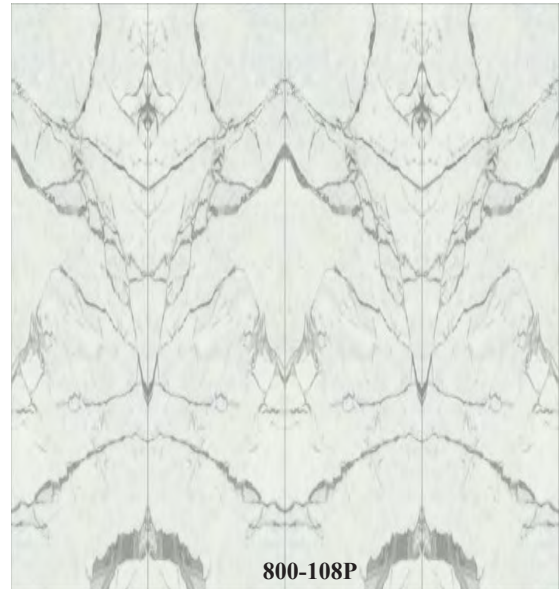

Block A Block B Block A Block B