


## Contemporary Basalt

Inspired by windblown sand and highlighted with mica chips that glisten with the light, Contemporary Basalt is a timeless elegant collection.

1. 6 colors and 2 sizes
2. Matte and Semi-Polished finishes
3. Mosaic and trim pieces available in matte finish only
4. Rectified

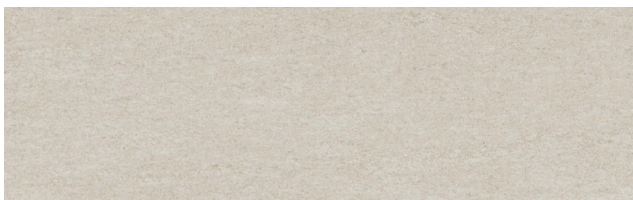

**200-201**



**200-202**




**200-203**



**200-204**




**200-205**

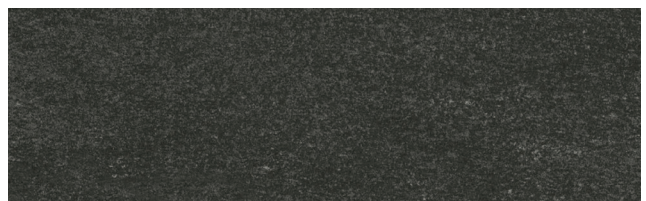


**200-206**

### Sizes, Mosaics and Trims



**18x36**



**12x24**



**2x2 Mosaic**  
Sheet Size: 12x12



**1x2 Brick Mosaic**  
Sheet Size: 12x12



**Bullnose**  
4x24



**Cove Base**  
6x12





## Floor and Wall Solutions

Order Samples at

331-702-2178

www.mondanicollection.com

### 1. FINISHES:

Matte and Semi-Polished

**Thickness: 8 mm**

**Recommended Grout Joint: 3/32" or greater**

**All sizes modular with 3/16" grout joint**

**Grout joints of 1/8" inch or less, may require floor flatness values in excess of the 1/4" in 10' (or 1/16" in 1.0') standard required by ANSI.**

### 2. TECHNICAL DATA

Physical Properties	ASTM Test	Industry Standards	Mondani Results
Water Absorption	C373	Impervious <0.5%	≤ 0.1%
Bond Strength	C482	≥ 50 psi	≥ 200 psi
Breaking Strength	C648	≥ 250 lbf	≥ 400 lbf
Hardness (Mohs)	(No regulated)	Range 0 - 10	≥ 7
Frost Resistance (Freeze/Thaw)	C1026	No sample must show alterations to surface	Resistant
Chemical Resistance	C650	No Requirement	Unaffected
Coefficient of Friction (Dynamic)	DCOF Acutest sn (wet)	≥ 0.42*	≥ 0.42
Aesthetic Classification	Visual Evaluation Shade & Texture	No Requirement	V2

\* All values given are for matte and semi-polished. No values are given for polished material. Mondani Collection does not recommend polished surfaces in area subject to exposure from grease, oil or water.

For level interior spaces to be walked upon when wet (see ANSI A137.1 section 6.2.2.1.10 – Section 9.6 for test procedure).

### 3. INSTALLATION

All installation work using Mondani Collection tiles will conform to the standards set forth in the latest version of ANSI A108/118 and/or the TCNA Handbook for Ceramic Tile installations.

Installation or setting materials:

Movement joints shall be provided throughout the tile and work will conform to ANSI Specification A108.01-3.7; A108.02 – 4.4. and TCNA Details EJ171.

Setting materials used will conform to the ANSI 118.4 standard or greater and be recommended by the selected manufacturer for the installation & setting materials for ceramic or porcelain tile based on the application requirements.




# MONDANI

COLLECTION

## Floor and Wall Solutions

Order Samples at  
331-702-2178  
[www.mondanicollection.com](http://www.mondanicollection.com)

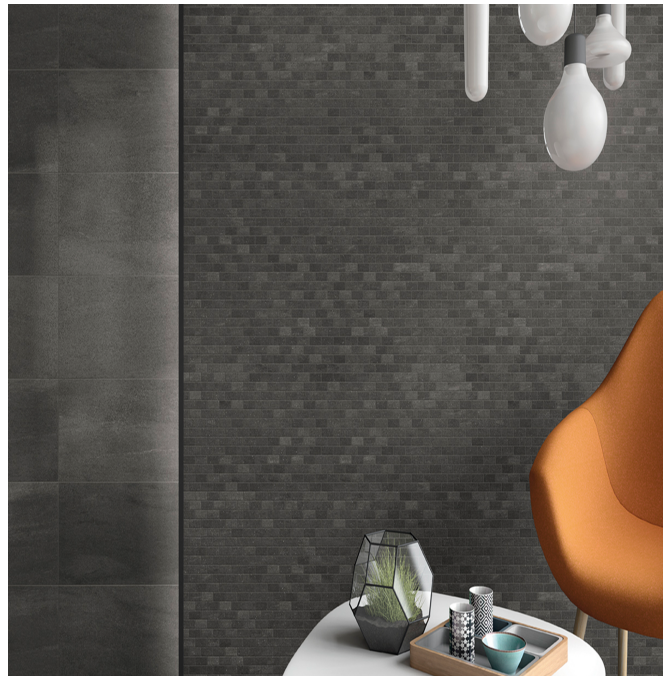

USA  
MADE/STOCK

