

---

## Dance

Traditional wood plank with warm tones gives Dance a rich timeless wood look, perfect for your next project

1. 6 Colors
2. 8" x 36"
3. Matte Finish



**600-201**




**600-202**




**600-203**



**600-204**

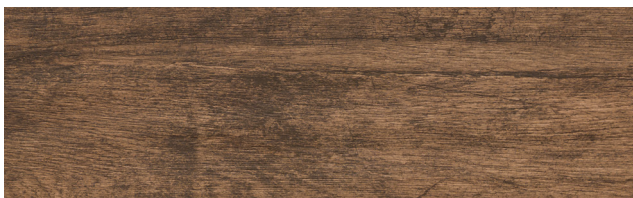

**600-205**

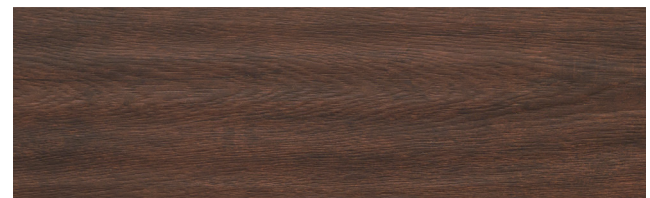

**600-206**

### Sizes, Mosaics and Trims



**8x36**



## Floor and Wall Solutions

Order Samples at  
331-702-2178

www.mondanicollection.com

### 1. FINISHES:

Matte

**Thickness: 10 mm**

**Recommended Grout Joint: 3/32" or greater**

**All sizes modular with 3/16" grout joint**

**Recycled Content: 40% \*Pre-Consumer. Recommended Grout Joint: 3/32" or greater. All sizes modular with 3/16" grout joint**

**Grout joints of 1/8" inch or less, may require floor flatness values in excess of the 1/4" in 10' (or 1/16" in 1.0') standard required by ANSI.**

### 2. TECHNICAL DATA

| Physical Properties               | ASTM Test                         | Industry Standards                         | Mondani Results      |
|-----------------------------------|-----------------------------------|--|----------------------|
| Water Absorption                  | C373                              | Impervious <0.5%                           | Pass                 |
| Bond Strength                     | C482                              | ≥ 50 psi                                   | 200 psi              |
| Breaking Strength                 | C648                              | ≥ 250 lbf                                  | ≥ 400 lbf            |
|                                   | Scratch Test                      |  |                      |
| Hardness (Mohs)                   | (No regulated)                    | Range 0 - 10                               | 6                    |
| Frost Resistance                  |                                   | No sample must show alterations to surface |                      |
| (Freeze/Thaw)                     | C1026                             | No Requirement                             | Pass                 |
| Chemical Resistance               | C650                              | Range E - A                                | Unaffected           |
| Coefficient of Friction (Dynamic) | DCOF Acutest<br>sn<br>(wet)       | ≥ 0.42*                                    | > 0.42               |
| Aesthetic Classification          | Visual Evaluation Shade & Texture | No Requirement<br>Range V0 - V4            | No Requirement<br>V3 |

\* All values given are for matte and semi-polished. No values are given for polished material. Mondani Collection does not recommend polished surfaces in area subject to exposure from grease, oil or water.

For level interior spaces to be walked upon when wet (see ANSI A137.1 section 6.2.2.1.10 – Section 9.6 for test procedure).

### 3. INSTALLATION

All installation work using Mondani Collection tiles will conform to the standards set forth in the latest version of ANSI A108/118 and/or the TCNA Handbook for Ceramic Tile installations.

Installation or setting materials:

Movement joints shall be provided throughout the tile and work will conform to ANSI Specification A108.01-3.7; A108.02 – 4.4. and TCNA Details EJ171.

Setting materials used will conform to the ANSI 118.4 standard or greater and be recommended by the selected manufacturer for the installation & setting materials for ceramic or porcelain tile based on the application requirements.





# MONDANI

COLLECTION

## Floor and Wall Solutions

Order Samples at  
331-702-2178  
[www.mondanicollection.com](http://www.mondanicollection.com)



USA  
MADE/STOCK

