


Subway

With a wide range of colors, Subway is a great option to color your walls.


1. 11 sizes
2. 25 colors
3. Matte and Polished



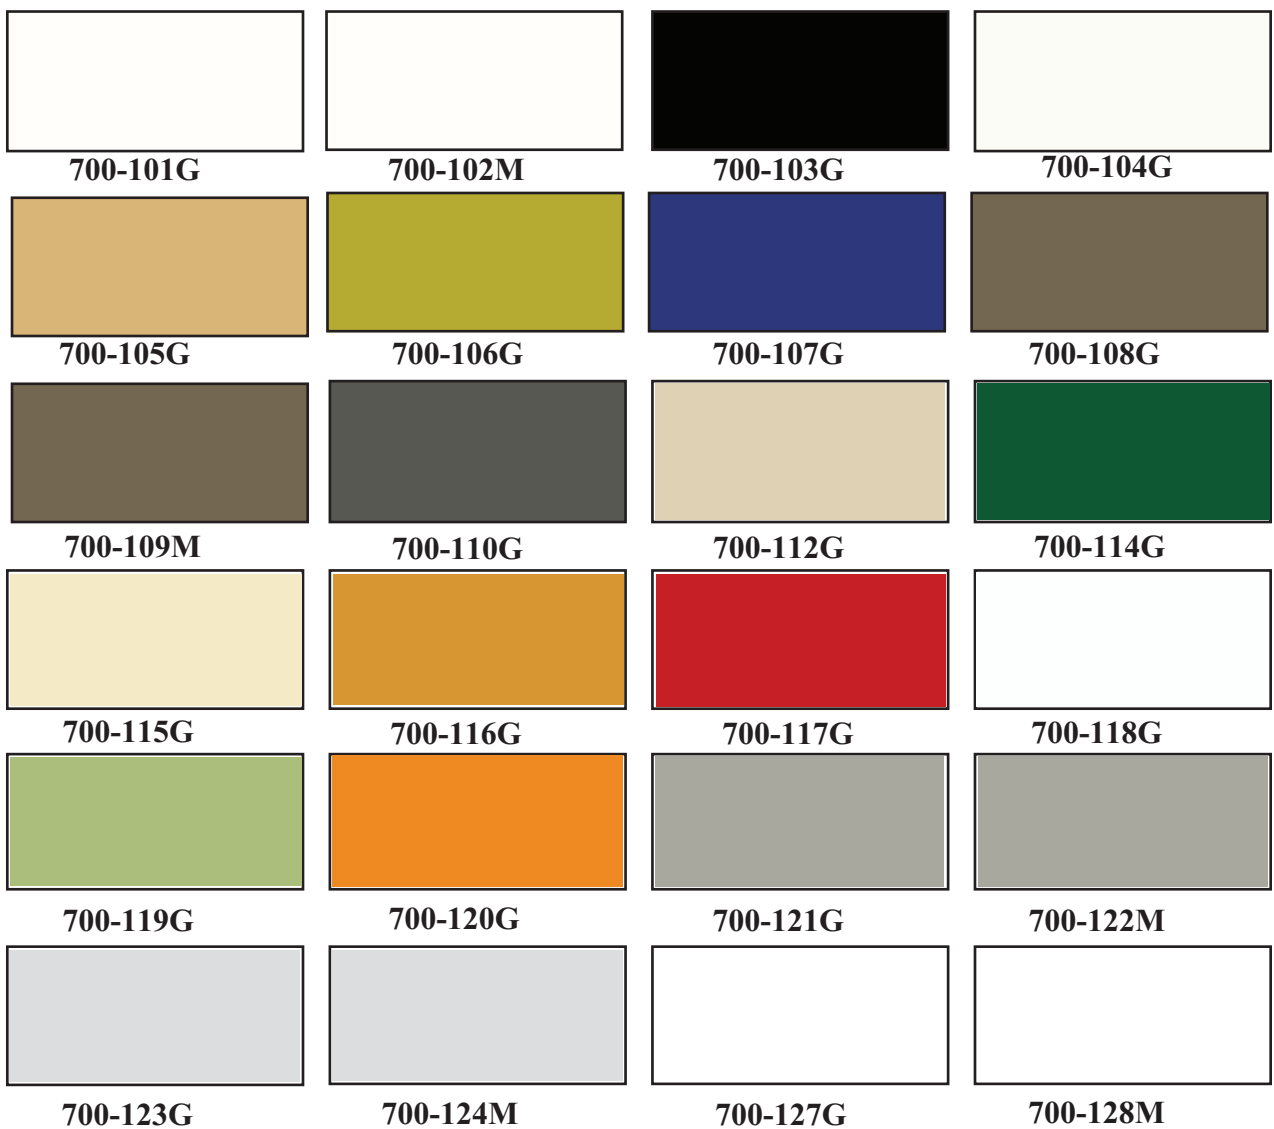


700-129G

Sizes



13x24



9.5x13



3x12



6x18



6x8



6x6



3x6




4 1/4x16



4 1/4x10



4 1/4x4 1/4



2x8

Technical Data

	2x8	4x4	4x10	4x16	3x6	6x6	6x8	6x18	3x12	9x13	13x24
700-127G	G	G	G BV,W	G	G,BV	G	G	G	G	G	G
700-101G	G	G	G	G	G,BV	G	G	G			
700-123G	G	G	G,BV	G,	G,BV	G	G	G	G		
700118G			G		G,BV						
700-104G			G		G,BV						
700-103G		G			G,BV						
700-112G		G	G		G	G		G			
700-121G		G	G	G	G	G					
700-108G		G	G		G	G		G			
700-110G		G			G						
700-115G		G			G	G					
700-105G		G			G	G					
700-102M	M	M	M	M	M,BV	M	M	M			
700-116G		G			G						
700-120G		G			G	G					
700-129G		G			G						
700-119G		G			G	G					
700-106G		G			G	G					
700-114G		G			G	G					
700-109M		M	M		M	M		M			
700-107G		G			G	G					
700-122M		M	M	M	M	M					
700-117G		G			G	G					
700-124M		M	M,BV	M	M,BV	M			M		
711-128M	M	M	M,BV	M	M,BV	M	M	M	M		

Key

M: Matte G: Glossy BV: Beveled





Floor and Wall Solutions

Order Samples at

331-702-2178

www.mondanicollection.com

1. FINISHES:

Matte and Glossy

Type: Ceramic Wall Tile

Application: Indoor

Thickness: 7mm (2x8, 4x4, 6x6, 3x6 BV, 9.5x13) / 7.3 mm (3x12, 4x10, 4x10BV) / 8.0mm (4x16, 6x18,13x24)

Recycled Content: 28% *Pre-Consumer. Recommended Grout Joint: 3/32" or greater. All sizes modular with 3/16" grout joint

2. TECHNICAL DATA

Physical Properties	ASTM Test	ISO Test	Industry Standards	Mondani Results
Water Absorption	C373	ISO-10545/3	7.0% < wa <=20%	>10%
Breaking Strength	C648	ISO-10545/4	≥ 250 lbf	≥ 400 lbf
Scratch Hardness	MOH's Scale	EN-101	-	3
Chemical Resistance	C650	ISO-10545/13	Unaffected	Unaffected
Shade and Texture	CTDA "V"	-	-	V1
Warpage	C485	ISO-10545/2	0.0075	Pass
Wedging	C502	ISO-10545/2	1.0% Max	Pass

3. INSTALLATION

All installation work using Mondani Collection tiles will conform to the standards set forth in the latest version of ANSI A108/118 and/or the TCNA Handbook for Ceramic Tile installations.

Installation or setting materials:

Movement joints shall be provided throughout the tile and work will conform to ANSI Specification A108.01-3.7; A108.02 – 4.4. and TCNA Details EJ171.

Setting materials used will conform to the ANSI 118.4 standard or greater and be recommended by the selected manufacturer for the installation & setting materials for ceramic or porcelain tile based on the application requirements.



USA
MADE/STOCK



MONDANI COLLECTION

Floor and Wall Solutions

Order Samples at
331-702-2178
www.mondanicollection.com



USA
MADE/STOCK

