


Buzz

Traditional wood tile with subtle grains for a crisp, natural aesthetic. Buzz is a contemporary wood available in both planks and chevrons sizes to meet your design needs.


1. 5 Colors
2. Available in rectified planks and chevrons
3. Matte finish
4. Mosaics and trim available



400-501

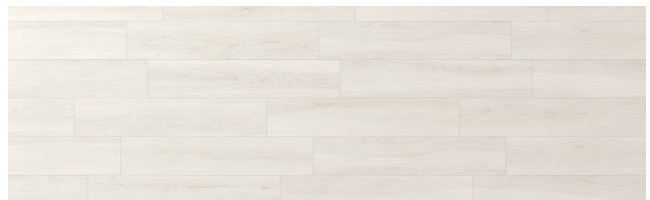


400-502

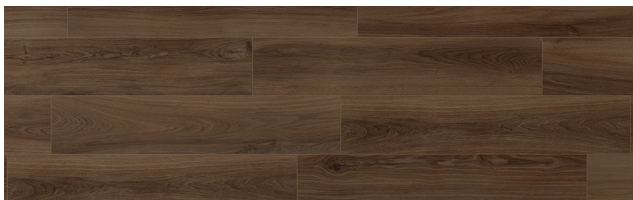

400-503



400-504

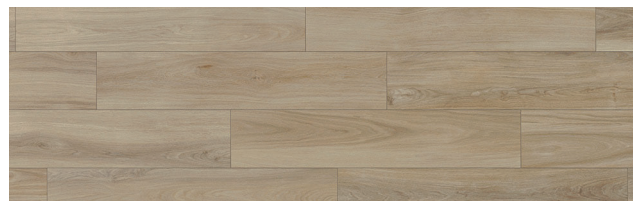

400-505

Sizes, Mosaics and Trims




8x40



8x40



Listels Mosaic
2.5x19
Sheet Size: 10x19



Bullnose
2.5x20



Floor and Wall Solutions

Order Samples at
331-702-2178

www.mondanicollection.com

1. FINISHES:

Matte

Thickness: 9 mm

Recommended Grout Joint: 3/32" or greater

All sizes modular with 3/16" grout joint

Grout joints of 1/8" inch or less, may require floor flatness values in excess of the 1/4" in 10' (or 1/16" in 1.0') standard required by ANSI.

2. TECHNICAL DATA

Physical Properties	ASTM Test	Industry Standards	Mondani Results
Water Absorption	C373	Impervious <0.5%	Pass
Bond Strength	C482	≥ 50 psi	≥ 200 psi
Breaking Strength	C648	≥ 250 lbf	≥ 400 lbf
Hardness (Mohs)	(No regulated)	Range 0 - 10	≥ 6
Frost Resistance		No sample must show alterations to surface	
(Freeze/Thaw)	C1026	No Requirement	Pass
Chemical Resistance	C650	Range E - A	Unaffected
Coefficient of Friction (Dynamic)	DCOF Acutest m (wet)	≥ 0.42*	> 0.42
Aesthetic Classification	Visual Evaluation Shade & Texture	No Requirement	
		Range V0 - V4	V2

* All values given are for matte and semi-polished. No values are given for polished material. Mondani Collection. does not recommend polished surfaces in area subject to exposure from grease, oil or water.

For level interior spaces to be walked upon when wet (see ANSI A137.1 section 6.2.2.1.10 – Section 9.6 for test procedure).

3. INSTALLATION

All installation work using Mondani Collection tiles will conform to the standards set forth in the latest version of ANSI A108/118 and/or the TCNA Handbook for Ceramic Tile installations.

Installation or setting materials:

Movement joints shall be provided throughout the tile and work will conform to ANSI Specification A108.01-3.7; A108.02 – 4.4. and TCNA Details EJ171.

Setting materials used will conform to the ANSI 118.4 standard or greater and be recommended by the selected manufacturer for the installation & setting materials for ceramic or porcelain tile based on the application requirements.



SA

MADE/STOCK





Floor and Wall Solutions

Order Samples at
331-702-2178

www.mondanicollection.com



USA
MADE/STOCK

